



ZEC S.p.A.

Via Lungolorno 11 - 42052 Colorno (PR) - Italia

Tel. 0521 816631 - Fax 0521 816772

info@zecspa.com - www.zecspa.com

Capitale sociale: Euro 1.000.000

C.F., P.IVA e n. Iscr. Reg. Imprese Parma: IT01720400348

Numero REA: PR - 173914

## PA12 Polyamide Spirals PHL with straight terminals for trucks

- FOR TRUCKS
- DIN 74323 STANDARD



AUTOMOTIVE



LOW PRESSURE



AIR



PAINTS



CNG/LPG



FUEL



OTHER GASES



HYDRAULIC OIL

OIL/GREASE FOR  
LUBRICATION

OTHER OILS



WATER-BASED FLUIDS



WATER

## TECHNICAL FEATURES

Metric

	D	d	De	Lt 1	N° Turns	
Code	mm	mm	mm	mm	m	Available Colours
* SCA128X21	12	8	100	150	21	N-B-R-G
* SCA128X18	12	8	115	150	18	N-B-R-G
SCA129X21	12	9	100	150	21	N-B-R-G
SCA129X18	12	9	115	150	18	N-B-R-G
* SCA1612X17	16	12	145	150	17	N-B-R-G


N : Black

R : Red

G : Yellow

B : Blue

## TECHNICAL FEATURES

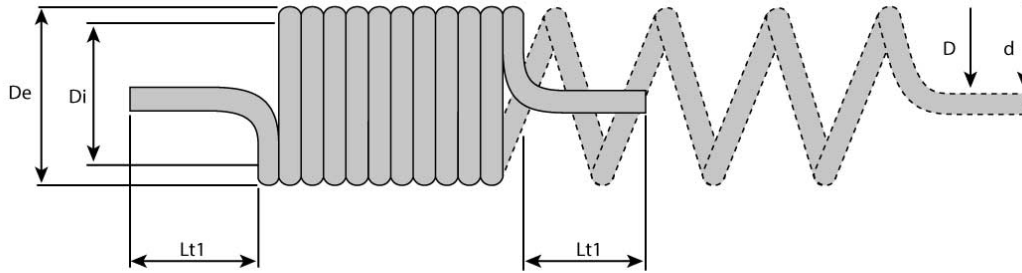

\* Measurement not provided for by DIN Standard 74323, the tube meets DIN 74324 and DIN 73378 Standards.

**NB:** There is an X in the code. This should be replaced with the letter representing the colour required: BLACK (N), BLUE (B), RED (R) and YELLOW (G). CODE EXAMPLE: code SCA129N21 - Truck spiral in Polyamide 12 12x9 BLACK with 21 turns. On request we can supply these spirals with a male fitting of 16x1.5 - Code SCAR129X21 - SCAR129X18.

Working temperature: from -40° to +80°C. Max. working temperature of water-based fluids +70°C.

**PRESSURES:** Working and burst pressures as per the corresponding tube (/en/products/automotive-en/trailer-braking-systems-automotive/pa12-phl-tubing-en)technical specification sheet.

#### OPTIONAL

 Color

 Packing

#### NORMATIVE

DIN 74323

For any further information about the optional items, please contact the sales office ()